

Acer Monitor XV272

LIFECYCLE EXTENSION GUIDE

Contents

Table of Contents

Important Safety Notice	3
1. Exploded Diagram	4
2. Wiring connectivity diagram	5
3. Mechanical Instruction	6
4. Disassembly and Assembly SOP	7
5. Troubleshooting	13
6. FRU List	15

Safety Notice

Any person attempting to service this chassis must familiarize with the chassis and be aware of the necessary safety precautions to be used when serving electronic equipment containing high voltage

Important Safety Notice

Product Announcement:

This product is certificated to meet RoHS Directive and Lead-Free produced definition. Using approved critical components only is recommended when the situation to replace defective parts. Vender assumes no liability express or implied, arising out of any unauthorized modification of design or replacing non-RoHS parts. Service providers assume all liability.

Qualified Repairability:

Proper service and repair is important to the safe, reliable operation of all series products. The service providers recommended by vender should being aware of notices listed in this service manual in order to minimize the risk of personal injury when perform service procedures. Furthermore, the possible existed improper repairing method may damage equipment or products. It is recommended that service engineers should have repairing knowledge, experience, as well as appropriate product training per new model before performing the service procedures.

NOTICE:

! To avoid electrical shocks, the products should be connect to an authorized power cord, and turn off the master power switch each time before removing the AC power cord.

! To prevent the product away from water or explosed in extremely high humility environment.

! To ensure the continued reliability of this product, use only original manufacturer's specified parts.

! To ensure following safety repairing behavior, put the replaced part on the components side of PWBA, not solder side.


! To ensure using a proper screwdriver, follow the torque and force listed in assembly and disassembly procedures to screw and unscrew screws.

! Using Lead-Free solder to well mounted the parts.

! The fusion point of Lead-Free solder requested in the degree of 220°C.

1. Exploded Diagram

1.1 Product Exploded Diagram

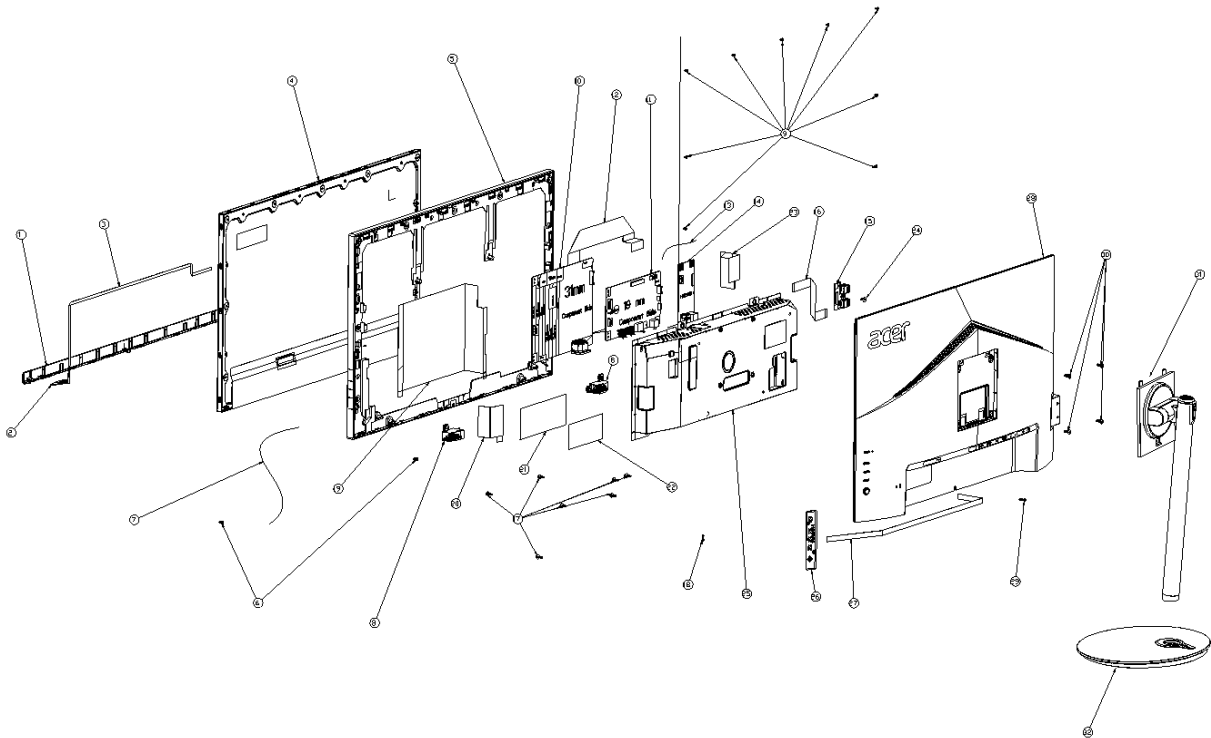

Item	ODM DESCRIPTION
1	ASSY TRIM
2	PCBA LED BD
3	LCDM
4	MID-FRAME
5	SCRW
6	SCRW
7	WIRE
8	SPK
9	SCRW
10	PCBA SPS BD
11	PCBA IF BD
12	FFC
13	WIRE
14	PCBA USB BD
15	PCBA USB SIDE BD
16	FFC
17	SCRW
18	SCRW


Item	ODM DESCRIPTION
19	MYLAR
20	MYLAR
21	TAPE
22	TAPE
23	MYLAR
24	SCRW
25	ASSY SHD
26	PCBA CTRL
27	FFC CTRL
28	ASSY RC
29	SCRW
30	SCRW
31	ASSY CLMN
32	ASSY BASE

2. Wiring connectivity diagram


There are two types of wiring diagrams for model XV272. The wiring connectivity position will be different according to the ACTUAL PCBA connector position. Please base on different SKU refer to below diagram.

NOTE: INF BD= Interface Board, PWR BD=Power Board, CTRL BD= Control Board

1. SKU with USB.

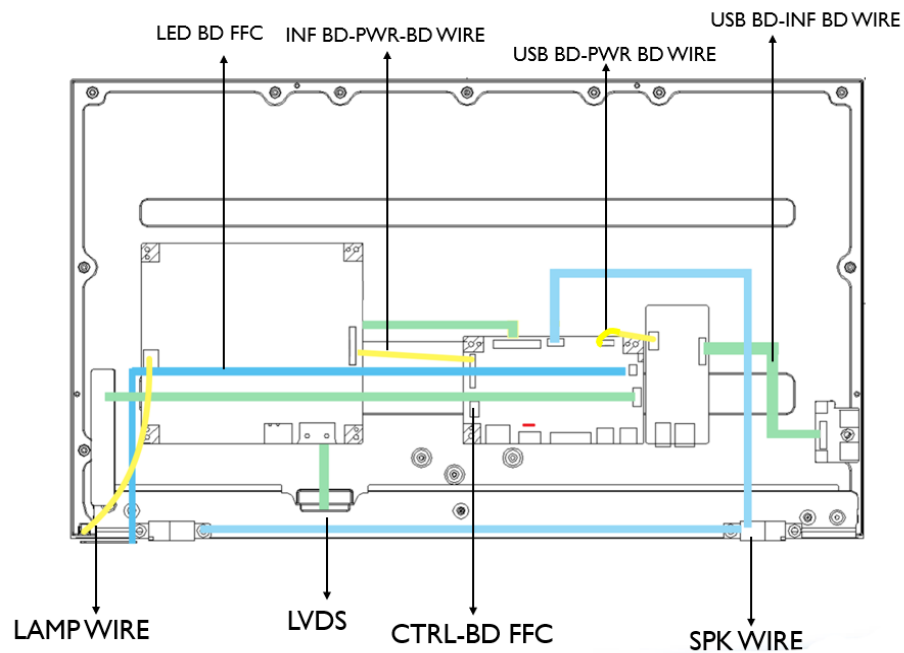

2. SKU without USB.

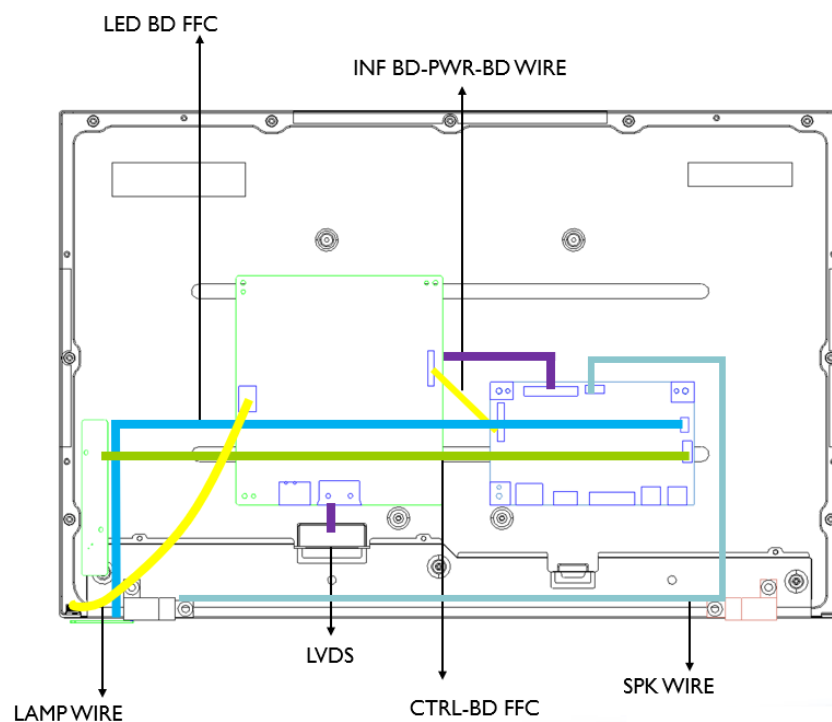

3. Mechanical Instruction

Tools Required

List the type and size of the tools that would typically can be used to disassemble the product to a point

where components and materials requiring selective treatment can be removed.

Tool Description:

- working table
- Screw-driver: Philips-head screwdriver, Hex-head screwdriver
- Knife
- glove
- cleaning cloth
- ESD protection

4. Disassembly and Assembly SOP

XV272

4.1 Disassembly Procedures

Preparation before disassemble

1. Clean the room for disassemble
2. Identify the area for monitor
3. Check the position that the monitors be placed and the quantity of the monitor ;prepare the area for material flow; according to the actual condition plan the disassemble layout
4. Prepare the implement, equipment, materials as bellow:
 - 1) working table
 - 2) Screw-driver: Philips-head screwdriver, Hex-head screwdriver
 - 3) knife
 - 4) glove
 - 5) cleaning cloth
 - 6) ESD protection



After unplugging the power cord, the power board still have power energy. Please pay attention when disassembling/assembling.

S1

Disassemble the RC,
stand and base


Before Disassembling & Assembling, monitor need to be put on the sponge and the Insulation glove must be wore during the process.

Disassemble base and stand from the RC(Rear Case) as picture 1.


Unlock RC center screw as picture 1.

Disassemble RC from monitor and extract the FFC CTRL from the IF BD as picture 2.

PICTURE 1

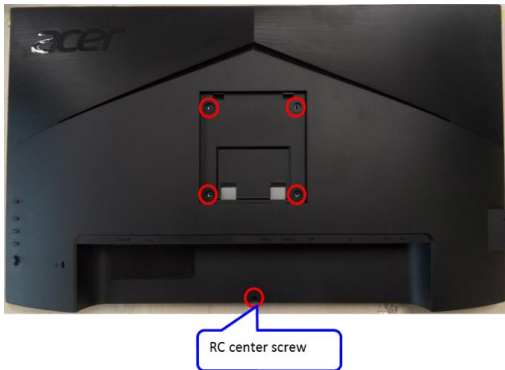

PICTURE 2

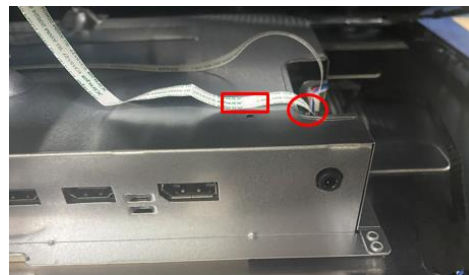

S2


Disassemble CTRL BD

Tear off the adhesive tape of the FFC CTRL from the RC as picture 1.

Disassemble the CTRL BD from the RC as picture 2.

Disassemble the FFC CTRL from the CTRL BD.

PICTURE 1

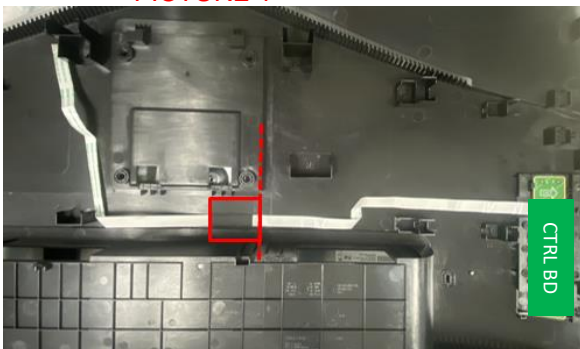


PICTURE 2



<p>S3 Disassemble SPK and Lamp wire</p>	<p>Tear off 4 tapes of the SPK wire, extract the SPK wire from the IF BD and disassemble the SPK from the MF as picture 1. Extract the LED wire from the IF BD and tear off the wire from the SHD as picture 1 in green frame. Tear off the black tape of the lamp wire, tear off black mylar on SHD and extract the lamp wire from the P/BD as picture 2</p>
--	---

PICTURE 1

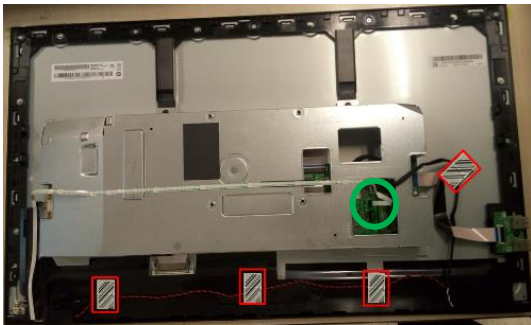

PICTURE 2



<p>S4 Disassemble USB SIDE BD</p>	<p>Tear off the small Mylar from the SHD as picture 1. Extract the USB FFC from USB BD and tear off the USB FFC from the panel as picture 2. Unlock the USB screw from the USB IF BD and disassemble the USB IF BD from the MF as picture 3. Extract The USB FFC from the USB IF BD.</p>
--	--

PICTURE 1



PICTURE 2



PICTURE 3










<p>S5 Disassemble ASSY Trim</p>	<p>Unlock 2 TRIM screws and disassemble the ASSY TRIM from the MF as picture 1. Disassemble the LED BD from the Trim and extract the LED wire from the LED BD as picture 2.</p>
--	---

PICTURE 1

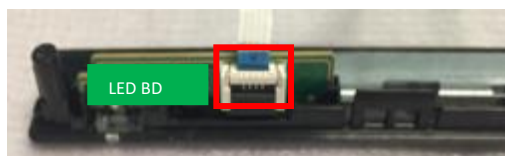

PICTURE 2

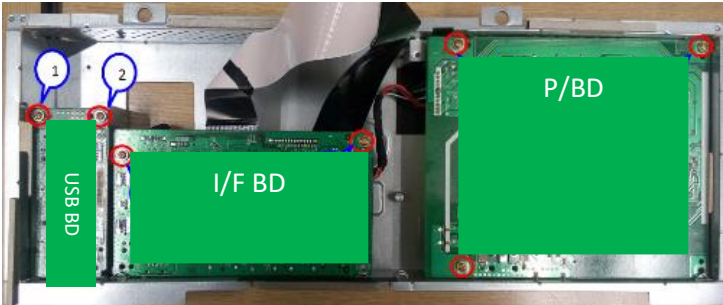

<p>S6 Disassemble SHD and MF.</p>	<p>Tear off tapes and extract FFC wire from the panel as picture 1. Unlock 9 screws from the MF and disassemble the MF from the Pane as picture 2. Extract the lamp wire from the panel as picture 2.</p>	
<p style="text-align: center;">PICTURE 1</p> 	<p style="text-align: center;">PICTURE 2</p> 	<p style="text-align: center;">PICTURE 3</p> 
<p>S7 Disassemble I/F BD and P/BD.</p>	<p>Remove Mylar and unlock 7 PCBA screws and 1 DP screw from the PCBA BD. Disassemble the USB BD from the SHD and extract the USB wire from the USB BD as picture 2. Disassemble the I/F BD from the SHD and extract the P/BD wire and 2 FFC LVDS from the I/F BD. Disassemble the P/BD from the SHD.</p>	
<p style="text-align: center;">PICTURE 1</p> 	<p style="text-align: center;">PICTURE 2</p> 	
	<p>NOTE: Circuit boards >10 cm² has been highlighted with the yellow rectangle as above image shows. Please detach the Circuit boards and follow local regulations for disposal.</p>	

4.2 Assembly Procedures

Preparation before assemble:

1. Clean the room for work
2. Identify the area for material
3. Prepare the implement, equipment, materials as bellow:
 - 1) working table
 - 2) Screw-driver: Philips-head screwdriver, Hex-head screwdriver
 - 3) Knife
 - 4) Glove
 - 5) Cleaning cloth
 - 6) ESD protection



After unplugging the power cord, the power board still have power energy. Please pay attention when disassembling/assembling.

S1

Assemble I/F BD and P/BD from SHD.

Before Disassembling & Assembling, monitor need to be put on the sponge and the Insulation glove must be wore during the process.

Assemble the P/BD to the SHD as picture 1.


Insert the FFC LVDS, P/BD wire and USB wire to the IF BD and assemble the IF BD to the SHD as picture 2.

Insert USB wire to the USB BD and assemble the USB BD to the SHD; then lock 7 PCBA screws and 1 DP screw as picture 3.


PICTURE 1



PICTURE 2

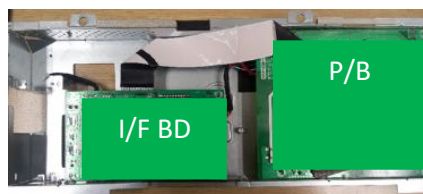

PICTURE 3

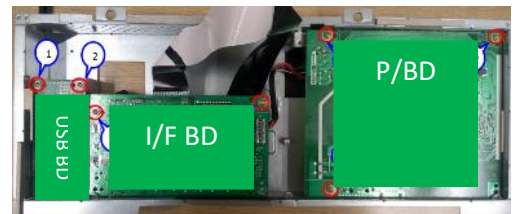**S2**

Assemble Panel to MF

Take the Panel and insert lamp wire to panel marked as picture 1.


Assemble the MF to the panel and lock 9 screws to the MF as picture 2.

Stick 1 piece of adhesive tape on the little connector of lamp wire as picture 3.


PICTURE 1




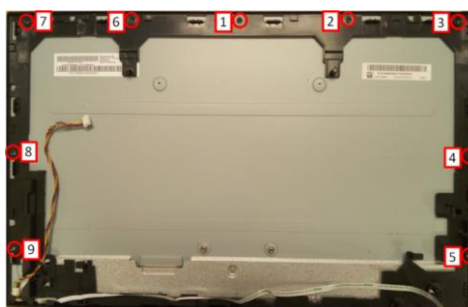



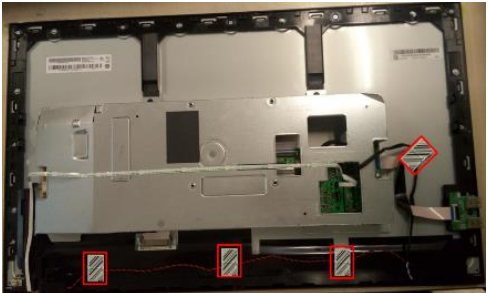


PICTURE 2



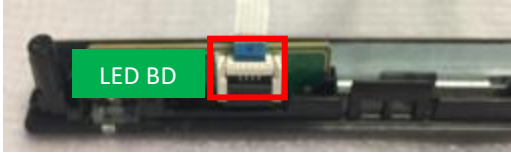
PICTURE 3

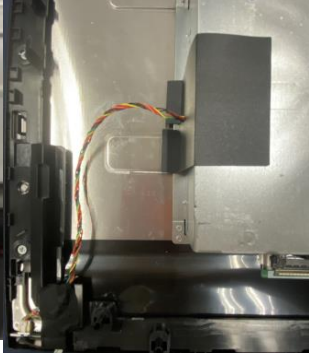


<p>S3 Assemble ASSY TRIM</p>	<p>Insert the LED wire into the LED BD and assemble the LED BD into the TRIM as picture 1. Assemble the ASSY TRIM on the MF. Lock 2 screws to the ASSY TRIM as the picture 3.</p>		
<p>PICTURE 1</p> 	<p>PICTURE 2</p> 		
<p>S4 Assemble SHD</p>	<p>Insert FFC LVDS into the Panel, stick 1 tape on the FFC LVDS as picture 1. Locate the SHD on the Panel and insert the big connector of the lamp wire to P/BD, then paste 1 mylar on SHD as picture 2. Tear off the 4 gums on the LED wire, arrange the LED wire and insert the LED wire into the I/F BD as picture 3.</p>		
<p>PICTURE 1</p> 	<p>PICTURE 2</p> 	<p>PICTURE 3</p> 	
<p>S5 Assemble USB SIDE BD and SPK</p>	<p>Insert USB FFC to USB Side BD, assemble USB side BD to MF and lock 1 screw as picture 1. Insert USB FFC to the USB BD, tear off the gum on the USB FFC and stick to the panel as picture, then assemble small Mylar to the SHD as picture 2. Assemble the SPK to the MF. Insert the wire of SPK into the I/F BD. Arrange the wire of SPK and stick 4 pieces of black tapes to fasten the wire of SPK on the Panel.</p>		
<p>PICTURE 1</p> 	<p>PICTURE 2</p> 	<p>PICTURE 3</p> 	

<p>S6 Assemble CTRL BD</p>	<p>Assemble the FFC CTRL to the CTRL BD and assemble the CTRL BD to the RC as picture 1. Stick a piece of adhesive tape to fasten the FFC CTRL on the RC as picture 2.</p>
---------------------------------------	--

PICTURE 1

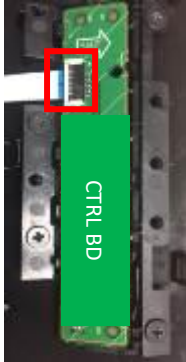


PICTURE 2

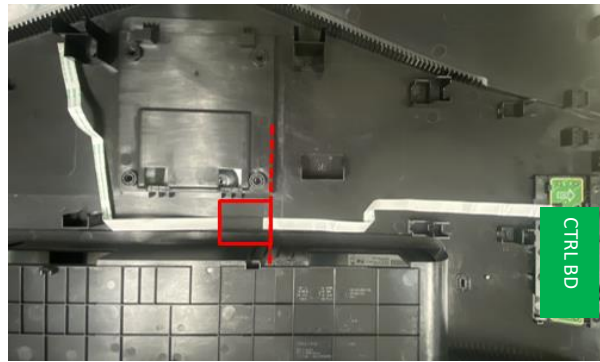


<p>S7 Assemble the RC, stand and base</p>	<p>Insert the FFC CTRL to the IF BD and assemble the RC to the MF as picture 1. Lock 1 screw to the RC as the picture 2. Assemble the Stand and Base to Monitor.</p>
--	--

PICTURE 1

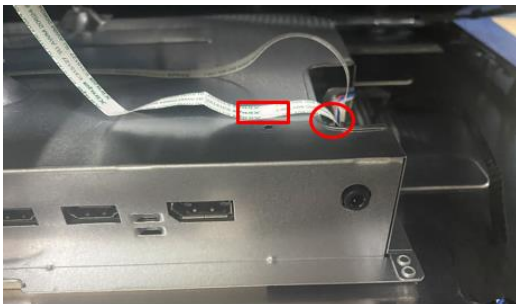

PICTURE 2

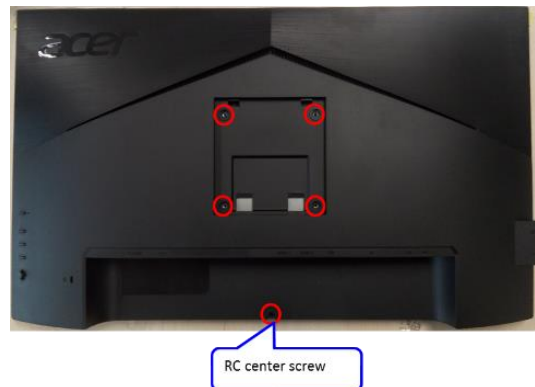

NOTE: Circuit boards >10 cm² has been highlighted with the yellow rectangle as above image shows. Please detach the Circuit boards and follow local regulations for disposal.

5. Troubleshooting

TROUBLESHOOTING

Before sending your LCD monitor for servicing, please check the trouble-shooting list below to see if you can self-diagnose the problem.

(VGA Mode)

Problems	Current Status	Remedy
No Picture	LED ON	<ul style="list-style-type: none"> Using OSD, adjust brightness and contrast to maximum or reset to their default settings.
	LED OFF	<ul style="list-style-type: none"> Check the power switch. Check if AC power cord is properly connected to the monitor.
	LED displays amber color	<ul style="list-style-type: none"> Check if video signal cable is properly connected at the back of monitor. Check if the power of computer system is ON.
Abnormal Picture	Unstable Picture	<ul style="list-style-type: none"> Check if the specification of graphics adapter and monitor is in compliance which may be causing the input signal frequency mismatch.
	Display is missing, center shift, or too small or too large in display size	<ul style="list-style-type: none"> Using OSD, adjust RESOLUTION, CLOCK, CLOCK-PHASE, H-POSITION and V-POSITION with non-standard signals. Using OSD, in case of missing full-screen image, please select other resolution or other vertical refresh timing. Using OSD, in case of missing full-screen image, please select other resolution or other vertical refresh timing. Wait for a few seconds after adjusting the size of the image before changing or disconnecting the signal cable or powering OFF the monitor.
Abnormal Sound (Only Audio-Input model) (Optional)	No sound, or sound level is too low	<ul style="list-style-type: none"> Check the audio cable with the host PC is connected.
		<ul style="list-style-type: none"> Check if the volume setup of the host PC is in minimum position and try to raise the volume level.

(HDMI/DP Mode)

Problems	Current Status	Remedy
No Picture	LED ON	<ul style="list-style-type: none"> Using OSD, adjust brightness and contrast to maximum or reset to their default settings.
	LED OFF	<ul style="list-style-type: none"> Check the power switch.
		<ul style="list-style-type: none"> Check if AC power cord is properly connected to the monitor.
	LED displays amber color	<ul style="list-style-type: none"> Check if video signal cable is properly connected at the back of monitor.
<ul style="list-style-type: none"> Check if the power of computer system is ON. 		
Abnormal Sound (Only Audio-Input model) (Optional)	No sound, or sound level is too low	<ul style="list-style-type: none"> Check the audio cable with the host PC is connected.
		<ul style="list-style-type: none"> Check if the volume setup of the host PC is in minimum position and try to raise the volume level.

6. FRU List

This chapter gives you the FRU (Field Replaceable Unit) listing in global configurations of ACER XV272. Refer to this chapter whenever ordering for parts to repair or for RMA (Return Merchandise Authorization).

Please note that WHEN ORDERING FRU PARTS, you should check the most up-to-date information available on your regional web or channel. For whatever reasons a part number change is made, it will not be noted on the printed Service Guide. For AUTHORIZED SERVICE PROVIDERS, your office may have a DIFFERENT part number code from those given in the FRU list of this printed Service Guide. You MUST use the local FRU list provided by your regional office to order FRU parts for repair and service of customer machines

NOTE: To scrap or to return the defective parts, you should follow the local government ordinance or regulations on how to dispose it properly, or follow the rules set by your regional office on how to return it.

Category	ACER DESCRIPTION	Description	PART NO.
LCD			
	LED LCD Panel AUO 27" FHD None Glare M270HAN02.2 U0 1000:1 14ms 400nit	LCDM 27W M270HAN02.2 U0 Z	KL.27005.054
BOARD			
	MAIN BOARD 2H1DP+S+USB	PCBA IF BD MI 2H1DP+S XV272	55.TGDM3.003
	POWER BOARD 2H1DP+S+USB	PCBA SPS BD MI XV272	55.TGDM3.002
	USB BOARD	PCBA USB BD MI B277U	55.TDBM3.003
	USB SIDE BOARD	PCBA USB SIDE BD MI B277	55.TBTM3.005
	FUNCTION KEY BOARD WITH WIRE	PCBA CTRL BD MI VG271U HOTBAR	55.TBTM3.003
	LED BOARD WITH WIRE	PCBA LED BD MI VG271U HOTBAR	55.TBTM3.006