Acer LCD Monitor Quick Start Guide (QSG)


Important safety instructions

Please read the following instructions carefully.

- To clean the LCD monitor screen:
 - · Turn off the LCD monitor and unplug the power cord.
- Spray a non-solvent cleaning solution onto a rag and clean the screen gently.
- Do not place the LCD monitor near a window. Exposing the monitor to rain, moisture or sunlight can severely damage it.
- 3. Do not apply pressure to the LCD screen. Excessive pressure may cause permanent damage to the display.
- Do not remove the cover or attempt to service this unit yourself. An authorized technician should perform servicing of any nature.
- Store the LCD monitor in a room with a temperature of -20° to 60° C (-4° to140° F). Storing the LCD monitor outside
 this range may result in permanent damage.
- 6. Immediately unplug your monitor and call an authorized technician if any of the following circumstances occur:
 - Monitor-to-PC signal cable is frayed or damaged.
 - · Liquid spills onto the LCD monitor or the monitor is exposed to rain.
 - The LCD monitor or case is damaged.
- In order to prevent damage to the LCD pannel, do not place the monitor face down on a surface.


Connecting your monitor to a computer

- 1. Turn off your computer and unplug your computer's power cord.
- Connect the signal cable to the HDMI (optional) and /or DP (optional) input socket of the monitor, and the HDMI (optional) and /or DP (optional) output socket of the graphics card on the computer. Then tighten the thumbscrews on the signal cable connector.
- Connect the USB Cable(Optional)
 - Connect the USB 3.0 cable to port for fast charge.
 - Connect the USB 3.0 cable to port.
- 4. Insert the monitor power cable into the power port at the back of the monitor.
- 5. Connect the power adapter and power cord to the monitor, then to a properly grounded AC outlet.

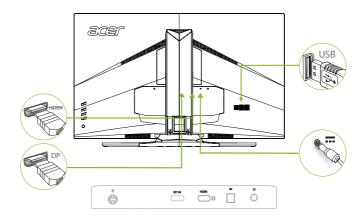



Note: Audio output is only for audio output model. Please check user manual for more instruction.



External controls

1	Power button	Turns the monitor on/off.Blue indicates power on. Amber indicates standby/ power saving mode.
2	Function key	 a. Press to view Main page. Press again to enter hotkey1 function. b. When the Function Menu is active, press this key to view the basic information for your monitor and current input or reset the custom color settings to the factory defaults.
3	Function key	 a. Press to view Main page.Press again to enter hotkey2 function. b. When the Function Menu is active, press this button to select select scenario mode or game mode.
4	Function key	 a. Press to view Main page.Press again to enter Input select function. b. When the Function Menu is active, this button will quit the OSD.
5	Function key	 a. Press to view Main page.Press again to enter next function in the Function Menu. b. The single toggle button on the backside of the Display bezel operates like a joystick. To move the cursor, simply toggle the button in four directions. Press the button to select desired option. Red indicates operable. Grey indicates inoperable.

G-SYNC (DP only):

1920x1080@60Hz:

G-SYNC requires an NVIDIA GeForce GTX650Ti BOOST GPU or higher. For more information, visit the nVidia® website: http://www.nvidia.com/page/home.html

2560x1440@144Hz:

G-SYNC requires an NVIDIA GeForce GTX960 BOOST GPU or higher. For more information, visit the nVidia® website:http://www.nvidia.com/page/home.html

Regulations and safety notices

FCC notices

This device has been tested and found to comply with the limits for a Class B digital device pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This device generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this device does cause harmful interference to radio or television reception, which can be determined by turning the device off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the device and receiver.
- · Connect the device into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/television technician for help.

CE declaration of conformity

Hereby, Acer Inc., declares that this LCD monitor is in compliance with the essential requirements and other relevant provisions of EMC Directive 2014/30/EU, Low Voltage Directive 2014/35/EU, and RoHS Directive 2011/65/EU and Directive 2009/125/EC with regard to establishing a framework for the setting of ecodesign requirements for energy-related product.

Notice: Shielded cables

All connections to other computing devices must be made using shielded cables to maintain compliance with EMC regulations.

Notice: Peripheral devices

Only peripherals (input/output devices, terminals, printers, etc.) certified to comply with the Class B limits may be attached to this equipment. Operation with non-certified peripherals is likely to result in interference to radio and TV reception.

Caution

Changes or modifications not expressly approved by the manufacturer could void the user authority, which is granted by the Federal Communications Commission, to operate this product. In order to prevent damage to the monitor, do not lift the monitor by its base.


Operation conditions

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Notice: Canadian users CAN ICES-3(B)/NMB-3(B)

Disposal of waste equipment by user in private household in the European Union



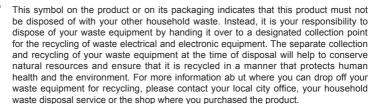

SPECIFICATION

	Driving system	TFT Color LCD			
	Size	31.5 "W (80cm)			
	Pixel pitch	0.36375mm(H) x 0.36375mm(V)			
	Brightness	300cd/m²(Typical)			
LCD Panel	Contrast	3,000:1(native)			
	Viewable angle (Typical)	178° (H) 178° (V) (CR≥10)			
	Response time	4ms (GTG,Typical)			
	Panel Type	VA			
	Video	Digital Interface	Digital Interface		
	H-Frequency	HDMI: 30~140KHz, DP: 88~240KHz			
	V-Frequency	HDMI: 24~60Hz, DP: 30~165Hz			
Display Colors		16.7M Colors			
Dot Clock		241.5 MHz(HDMI)/ 635.5 MHz(DP)			
Max. Resolution		DP:2560x1440 @165 HZ HDMI:2560x1440 @60Hz			
Plug & Play		VESA DDCCI/DDC2B			
Energy Efficiency Class		В			
*Annual Energy Consumpt		73 (kWh) (for HDMI-input Model)			
Power consumption	ON Mode	45W(typ.)			
@200cd/m ²	Sleep Mode	0.5W(typ.)			
	Off	0.45W(typ.)			
land Orange atom		DP (Only DP Model)			
Input Connector		HDMI (Only HDMI model) USB Hub / USB3.0 x 4 (Only USB Hub Model)			
Input Video Signal		DP signal(Only DP-Input Model) HDMI signal(Only HDMI-Input Model)			
Speakers(Typical)		7W x 2			
Audio		Audio-Output (Only Audio-Output Model)			
Maximum Screen Size		Horizontal:697.344mm Vertical:392.256mm			
Power Source		100-240V~, 50/60Hz			
Environmental Considerations		Operating Temp: 5° to 36°C Storage Temp: -20° to 60°C Operating Humidity: 10% to 85%			
Dimensions		712.7 (W) x 484~604(H) x 298.3(D)mm			
Weight (N. W.)		10.1kg Unit (net)			
Mechanism spec		Tilt: -5° to +25° Swivel: +/- 25° Height adjustment: 120mm Pivot: No Detachable foot stand: Yes			
External Controls:	Functions	Brightness Contrast Blue Light Dark boost Adaptive contrast Gamma Color Temp Saturation 6-axis color Volume Over Drive OverClock Aim point	Language OSD Timeout Transparency Refresh rate num Input Ambient Light Hot Key Assignment Wide Mode Deep Sleep Quick Start Mode Power-off USB charge Game mode		
* All specifications are subject to change without notice.					

Find manuals and other documents for your Acer product on the official Acer support website.

^{*}Annual energy consumption is calculated using the typical power consumption 4 hours per day, 365 days per year.